

XE135B

Hydraulic Excavator



XE135B adopts the original imported Isuzu engine, which has strong power, green environmental protection, good fuel economy and high reliability. The hydraulic elements of the original imported international famous brand are of high efficiency, precise control, small impact and long service life. Combined with the new generation of XEICS intelligent control system independently developed by XCMG excavator, it can make full use of the output power of the engine and make full use of every drop of fuel. The main structural components are all optimized by FEA, and after long-term high-intensity operation assessment, the service life is longer. All the daily maintenance parts can be maintained on the ground, it can save time, labor and be safer. New injection-moulded cab is standard configured with double laminated glass, which can effectively block noise. Secondly, the cab uses an integrated control panel, the appearance is simple and stylish, the new silicone oil spring composite shock absorber, the all-round adjustable suspension seat, the operation is more comfortable.





Engine Model : ISUZU BB-4BG1TRP
Bucket Capacity : 0.4~0.52 m³
Operating Weight : 13000 kg
Rated power/speed : 72.7/2200 kW/rpm



Head Office Gaya Makmur Putra
Jl. Lingkar Luar Barat Duri Kosambi No.1 -Cengkareng
Jakarta Barat - Indonesia 11740
Telp : (62 21) 544 8128 / 30
Fax : (62 21) 544 8131
Email : info@gmtractors.com
Website : www.gmtractors.net

Overall Dimension

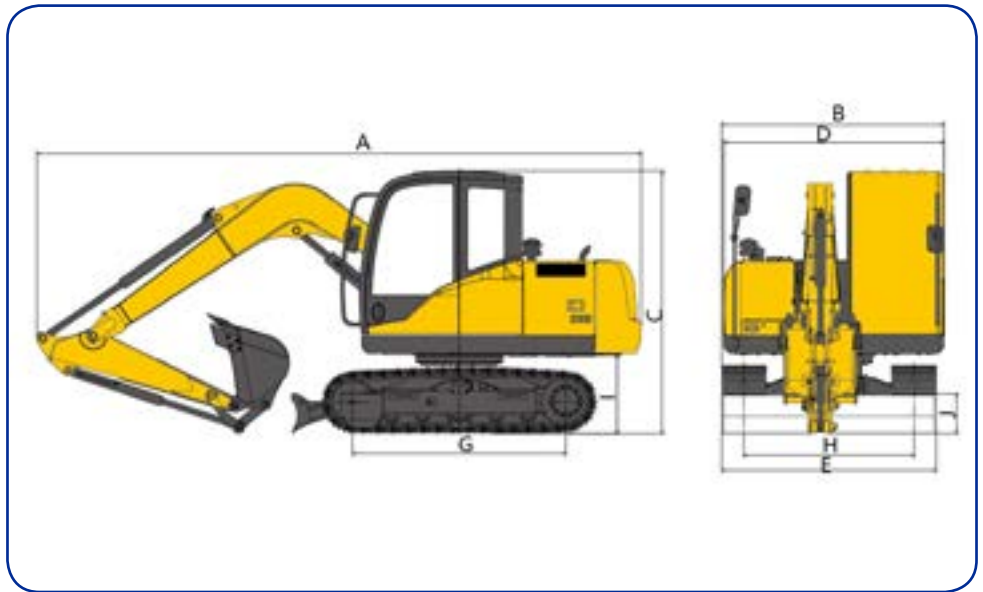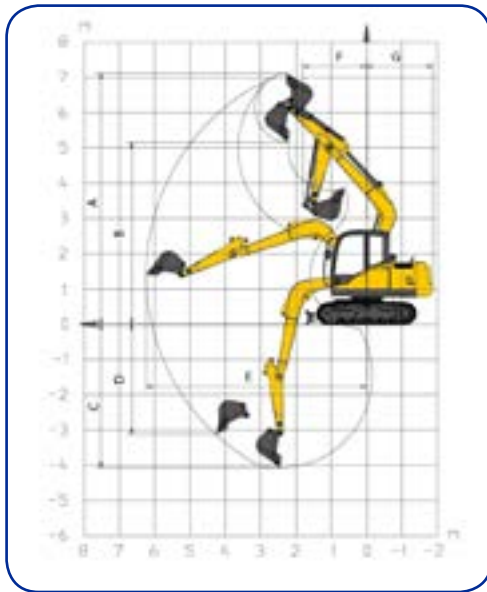

Main Specification

Item	Spesification
Operating weight	13000 kg
Bucket capacity	0.4~0.52 m ³
Engine	
Model	ISUZU BB-4BG1TRP
Electric injection	√
Four Strokes	√
Water Cooling	√
Turbo-charging	√
Air to air intercooler	X
No. of cylinder	4
Rated power/speed	72.7/2200 kW/rpm
Maximum torque/speed	337.6/1600 N.m/rpm
Displacement	4.329 L
Main Performance	
Travel speed (H/L)	5.16/3.03 km/h
Swing speed	12.3 r/min
Gradeability	≤35°
Ground pressure	42 kPa
Bucket digging force	85 kN
Arm digging force	65 kN
Maximum tractive force	134 kN
Hydraulic system	
Main pump	Two piston pumps
Rated flow of main pump	2 x 123 L/min
Main safety valve pressure	31.4/34.3 MPa
Travel system pressure	34.4 MPa
Swing system pressure	25 MPa
Pilot system pressure	3.9 MPa

Oil Capacity	
Fuel tank capacity	250 L
Hydraulic tank capacity	130 L
Engine oil capacity	14 L
Appearance size	
A. Overall length	7770 mm
B. Overall width	2512 mm
C. Overall height	2880 mm
D. Width of platform	2512 mm
E. Track length	3660 mm
F. Total width of chassis	2490 mm
G. Track shoe width	500 mm
H. Wheel base of crawler	2910 mm
I. Track gauge	1990 mm
J. Counterweight clearance	964 mm
K. Min. ground clearance	478 mm
L. Min. tail swing radius	2294 mm
M. Track height	838 mm
Working Range	
A. Max. digging height	8641 mm
B. Max. dumping height	6181 mm
C. Max. digging depth	5538 mm
D. Maximum depth cut for 2240mm(8 ft) level bottom	5287 mm
E. Max. vertical wall digging depth	4727 mm
F. Max. digging radius	8296 mm
G. Min. swing radius	2335 mm
Standard	
Length of boom	4600 mm
Length of arm	2510 mm
Bucket Capacity	0.52 m ³ Strengthened bucket)

THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.

Networking

Semarang | Surabaya | Medan | Pekanbaru | Palembang | Batam | Balikpapan | Banjarmasin | Makassar | Kendari | Manado