

XE75DA

Hydraulic Excavator



XE75DA hydraulic excavator can be used for digging, loading, leveling, ditching, crushing, drilling, clip cutting, lifting and other functions, which has played an increasingly important role in hydropower, transportation, municipal, garden, farmland reconstruction, oil pipeline and other small-scale construction and production field. Especially with the rapid development of urbanization, a large number of infrastructure projects, such as municipal maintenance, landscaping, environmental protection, water and electricity facilities and property management, has created a huge market space. Design use: suitable for suburban and narrow space; ambient temperature: -15°C ~ 40°C; Working objects: soil below grade III and loose materials.





Engine Model : Kubota V2607
Bucket Capacity : 0.18~0.30 m3
Operating Weight : 7460 kg
Rated power/speed : 42.4/2000 kW/rpm



Head Office Gaya Makmur Putra
Jl. Lingkar Luar Barat Duri Kosambi No.1 -Cengkareng
Jakarta Barat - Indonesia 11740
Telp : (62 21) 544 8128 / 30
Fax : (62 21) 544 8131
Email : info@gmtractors.com
Website : www.gmtractors.net

Overall Dimension

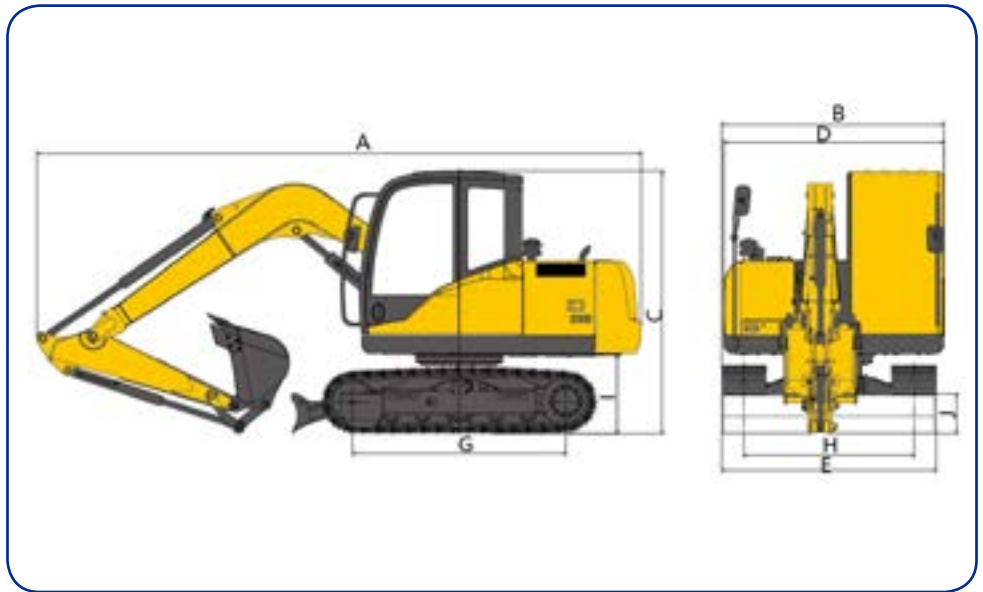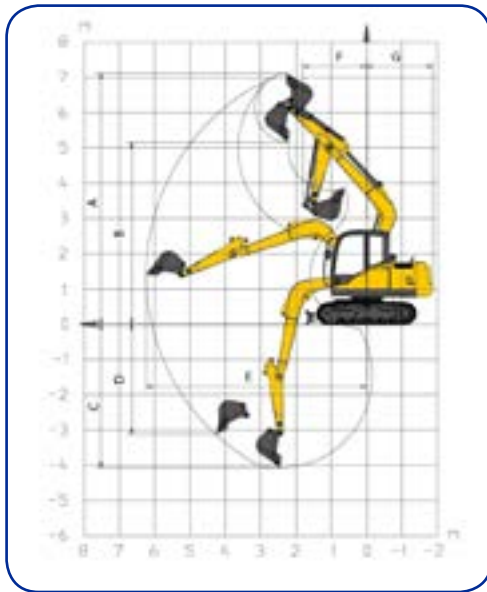

Main Specification

Item	Spesification
Operating weight	7460 kg
Bucket capacity	0.18~0.30 m ³
Engine	
Model	Kubota V2607
Electric injection	√
Four Strokes	√
Water Cooling	√
Turbo-charging	√
Air to air intercooler	√
No. of cylinder	4
Rated power/speed	42.4/2000 kW/rpm
Maximum torque/speed	222.5/1600 N.m/rpm
Displacement	2.615 L
Main Performance	
Travel speed (H/L)	5.4/2.9 km/h
Swing speed	10 r/min
Gradeability	≤35°
Ground pressure	33.5 kPa
Bucket digging force	57 kN
Arm digging force	38 kN
Maximum tractive force	68.3 kN
Hydraulic system	
Main pump	One piston pumps
Rated flow of main pump	160 L/min
Main safety valve pressure	26.5 MPa
Travel system pressure	26.5 MPa
Swing system pressure	18.6 MPa
Pilot system pressure	3.5 MPa

Oil Capacity	
Fuel tank capacity	130 L
Hydraulic tank capacity	76 L
Engine oil capacity	10 L
Appearance size	
A. Overall length	6150 mm
B. Overall width	2230 mm
C. Overall height	2685 mm
D. Width of platform	2070 mm
E. Track length	2825 mm
F. Total width of chassis	2200 mm
G. Track shoe width	450 mm
H. Wheel base of crawler	2195 mm
I. Track gauge	1750 mm
J. Counterweight clearance	795 mm
K. Min. ground clearance	380 mm
L. Min. tail swing radius	1800 mm
M. Track height	644 mm
Working Range	
A. Max. digging height	7085 mm
B. Max. dumping height	5160 mm
C. Max. digging depth	4020 mm
D. Max. vertical wall digging depth	2920 mm
E. Max. digging radius	6260 mm
F. Min. swing radius	1820 mm
Standard	
Length of boom	3720 mm
Length of arm	1622 mm
Bucket Capacity	0.30 m ³

THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.

Networking

Semarang | Surabaya | Medan | Pekanbaru | Palembang | Batam | Balikpapan | Banjarmasin | Makassar | Kendari | Manado